


# General information

## Cavity

Type series: DP

Dimensions and sectional view

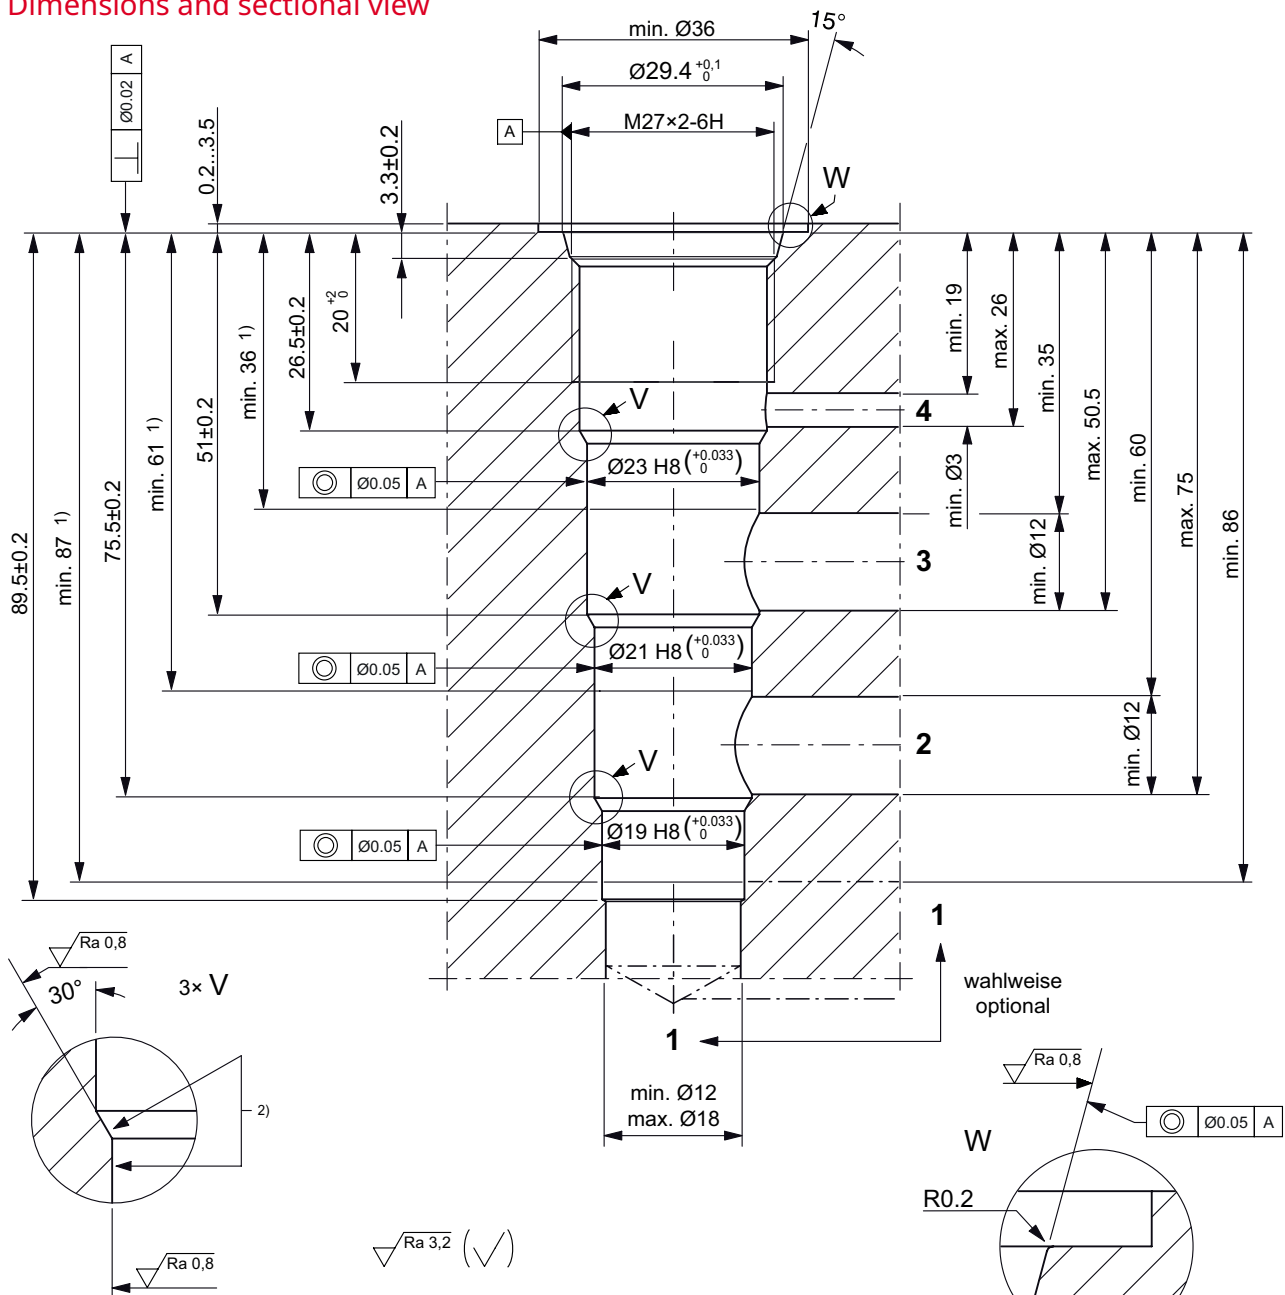

**HINWEIS!  
NOTE!**

- 1) Passungstiefe  
Minimum depth of specified diametral tolerance
- 2) Der Gewindeauslauf darf die Ringfläche und  $\text{Ø}23 \text{ H}8$  nicht verletzen.  
The thread runout must not damage the ring surface or the  $\text{Ø}23 \text{ H}8$ .

**Beispiel für die Masseinheit:  
Example for the dimensional units:**  
0.79 = 0.79 mm millimeter

## Installation information

**ATTENTION!**

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.

**NOTE!**

The cavity type DP complies with the standard according to ISO 7789: 27-09-0-07.

**NOTE!**

We offer form toolsets for sale or hire. For further information, see data sheet 400-P-040011.