

General information


Cavity

Type series: RCY

Dimensions and sectional view

Beispiel für die Masseinheit:
Example for the dimensional units:

0.79 = 0.79 mm millimeter

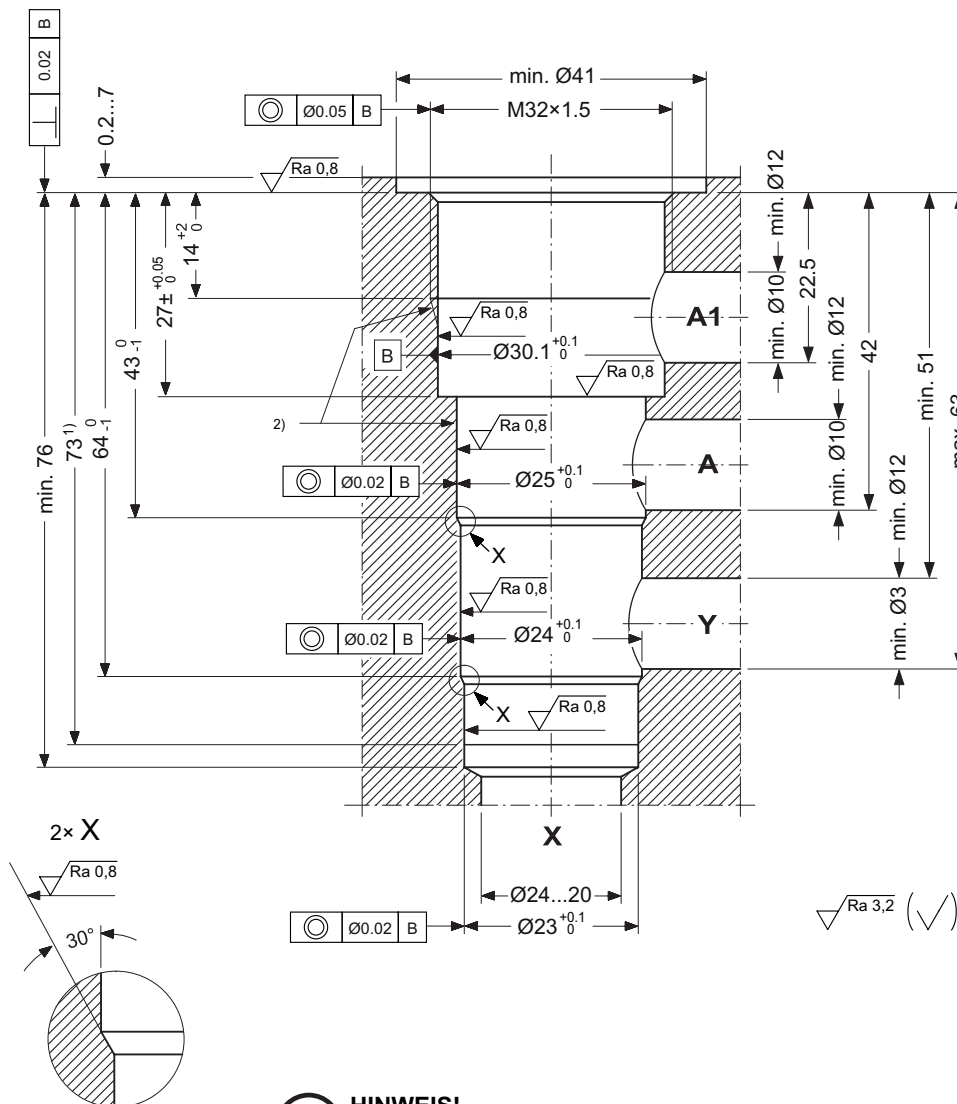

- 1) Passungstiefe
Minimum depth of specified diametral tolerance
- 2) Der Gewindeauslauf darf die Ringfläche und $\varnothing 25$ nicht verletzen.
The thread runout must not damage the ring surface or the $\varnothing 25$.

Installation information



NOTE!

We offer form tool sets for sale or hire. For further information, see data sheet 400-P-040011.



ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.